

300 WATT MULTI-LINE TVS ARRAY

DESCRIPTION

The DFN6-36 is a multi-line transient voltage suppressor array. This device is designed to protect sensor ports, portable electronics and 36V DC applications from the damaging effects of ESD and EFT.

The DFN6-36 is available in a unidirectional configuration with a working voltage of 33V and a minimum breakdown voltage of 35V. This device is rated for 300 Watt peak pulse power using the 8/20 μ s waveform, which is sufficient protection for tertiary type lightning threats at key interface locations.

The DFN6-36 is also suited to protect data lines against ESD and EFT. This device meets the IEC 61000-4-2 and IEC 61000-4 requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This device in conjunction with passive components integrated into a TVS/filter network can be used for EMI/RFI protection.

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A - 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 12A, 8/20 μ s - Level 1(Line-Gnd) & Level 2(Line-Line)
- 300 Watts Peak Pulse Power per Line (tp = 8/20 μ s)
- 200 Watts Peak Pulse Power per Line (tp = 1.2/50 μ s)
- ESD Protection > 25 kilovolts
- Low Clamping Voltage
- Protects up to 3 Data Lines
- RoHS Compliant
- REACH Compliant


APPLICATIONS

- Digital Sensor I/O Ports
- Control & Monitoring Systems
- Portable Electronics
- 36 Volt DC Protection

MECHANICAL CHARACTERISTICS

- Molded JEDEC DFN-6 Package
- Approximate Weight: 6 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

PIN CONFIGURATION




TYPICAL DEVICE CHARACTERISTICS
MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	300	Watts
Peak Pulse Power ($t_p = 1.2/50\mu s$) - See Figure 1	P_{PP}	200	Watts
Steady State Power	P_{SS}	0.4	Watts
Max Forward Voltage @ 100mA	V_F	1.4	V
Max Forward Voltage @ 50mA	V_F	1.3	V
Operating Temperature	T_A	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Peak Pulse Current ($t_p = 8/20\mu s$)	$I_{PPI(MAX)}$	6.0	Amps

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (Fig. 2)	MAXIMUM LEAKAGE CURRENT	TYPICAL CAPACITANCE
		V_{WM} VOLTS	@ 1mA $V_{(BR)}$ VOLTS	@ $I_p = 2A$ V_C VOLTS	@ V_{WM} I_D μA	@ 0V, 1MHz C_j pF
DFN6-36	D36	33.0	35.0	45.0	5.0	50

FIGURE 1
PEAK PULSE POWER VS PULSE TIME

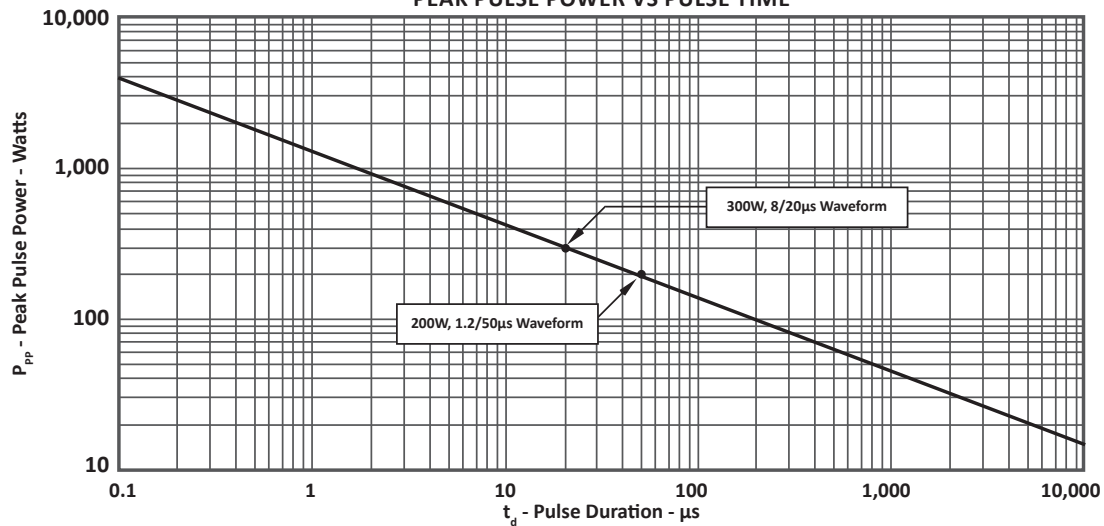

TYPICAL DEVICE CHARACTERISTICS

FIGURE 2
PULSE WAVE FORM


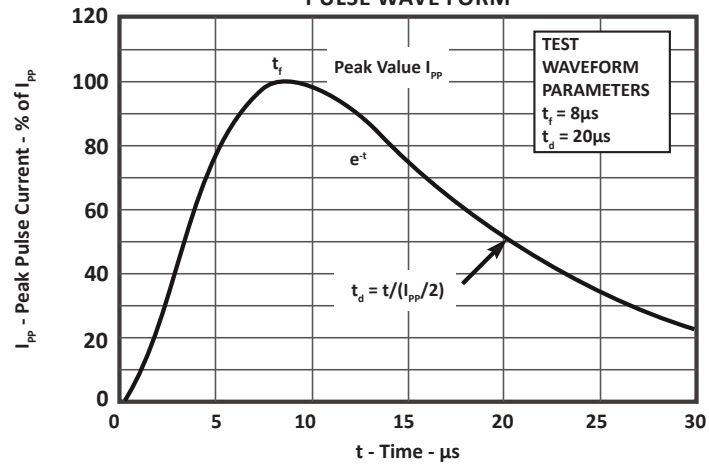


FIGURE 3
PULSE WAVEFORM

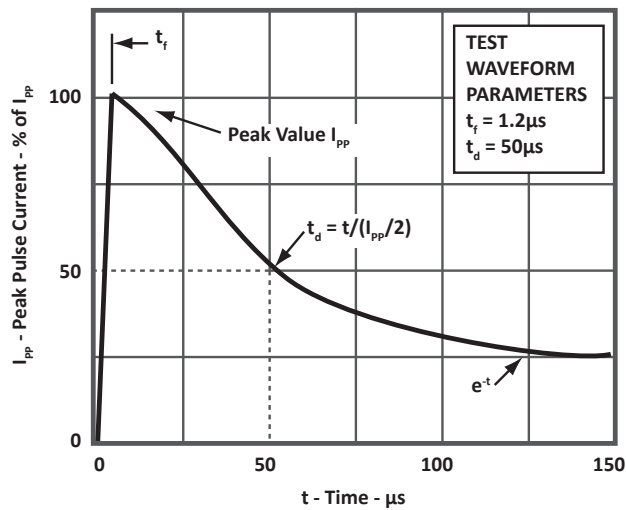

TYPICAL DEVICE CHARACTERISTICS

FIGURE 4
POWER DERATING CURVE


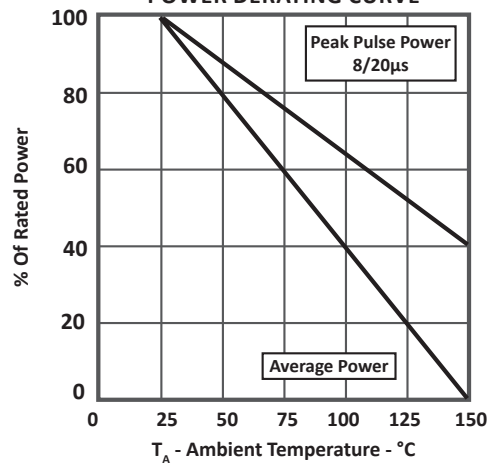


FIGURE 5
FORWARD CURRENT VS FORWARD VOLTAGE

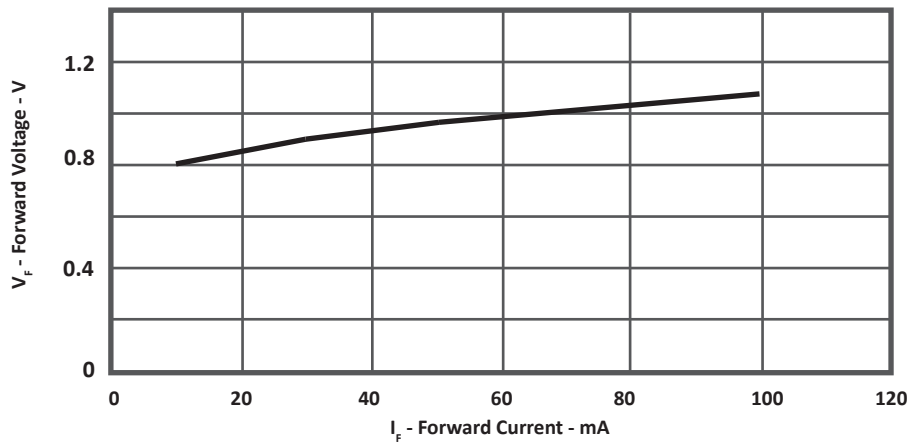


DFN-6 PACKAGE INFORMATION

OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.45	0.55	0.017	0.021
A3	0.13 BSC		0.005 BSC	
b	0.35	0.45	0.013	0.017
D	1.90	2.10	0.074	0.082
E	1.40	1.60	0.055	0.063
e	0.65 BSC		0.025 BSC	
L	0.45	0.55	0.017	0.021
L1	0.55	0.65	0.021	0.025
L2	0.65	0.75	0.025	0.029

NOTES

- Controlling dimension: millimeters.
- Dimensioning and tolerances per ANSI Y14.M, 1985.

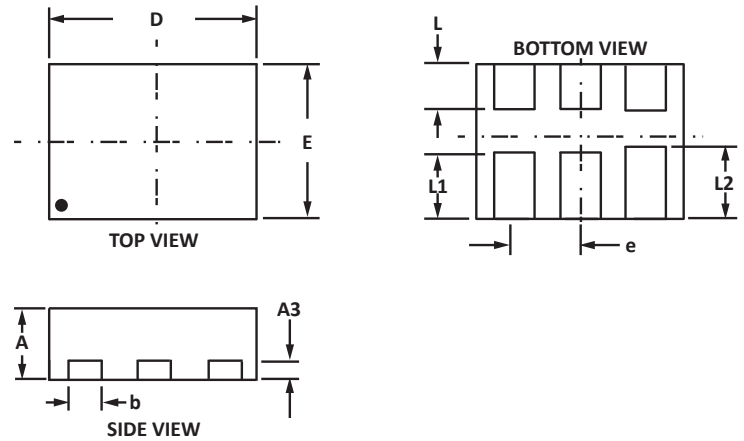


PAD LAYOUT DIMENSIONS


DIM	MILLIMETERS	INCHES
	NOMINAL	NOMINAL
A	1.78	0.070
B	1.93	0.076
C	0.64	0.025
D	0.86	0.034
E	0.51	0.020
F	0.76	0.030
G	0.94	0.037
H	0.30	0.012

NOTES

- Controlling dimension: millimeters.



TAPE AND REEL

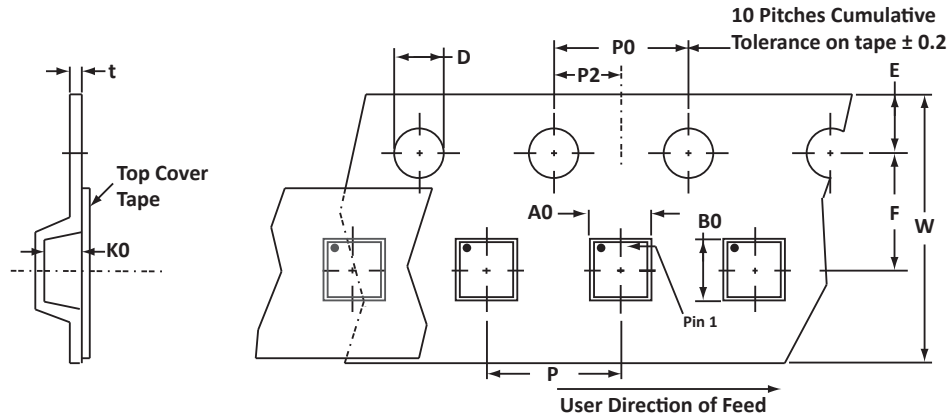

SPECIFICATIONS

REEL DIA.	TAPE WIDTH	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")	8mm	1.70 ± 0.10	2.20 ± 0.10	0.70 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

NOTES

- Dimensions are in millimeters.
- Surface mount product is taped and reeled in accordance with EIA-481.
- Suffix - T73 = 7" Reel - 3,000 pieces per 8mm tape.
- Marking on Part - marking code (see page 2) and polarity dot.

Package outline, pad layout and tape specifications per document number 06071.R1 3/11.

ORDERING INFORMATION

BASE PART NUMBER	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
DFN6-36	n/a	-T73	3,000	7"	n/a

This device is only available in a Lead-Free configuration.

COMPANY INFORMATION

COMPANY PROFILE

In business more than 20 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers high performance interface and linear products. They include analog switches; multiplexers; LED drivers; LED wafer die for ESD protection; audio control ICs; RF and related high frequency products.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2012 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.