

**ULTRA LOW CAPACITANCE ESD PROTECTION COMPONENT****DESCRIPTION**

The P0201V05 is an ultra low capacitance ESD component designed to protect very high-speed data interfaces. The device has a typical capacitance of only 0.15pF (I/O to GND) and is compatible with the ESD immunity requirements of IEC61000-4-2.

**FEATURES**

- Compatible with IEC 61000-4-2 (ESD): Air 15kV (Typical), 25kV(Max)
- Compatible with IEC 61000-4-2 (ESD): Contact 8kV (Typical), 15kV(Max)
- Low Leakage Current: 0.10 $\mu$ A
- Fast Response Time
- Protects One Bidirectional Line
- Ultra Low Capacitance: 0.15 pF (Typical)
- RoHS Compliant
- REACH Compliant

**APPLICATIONS**

- HDMI
- DVI
- Display Port
- Unified Display Interface (UDI)
- Mobile Display Digital Interface (MDDI)
- Gigabit Ethernet
- USB2.0 & USB3.0
- IEEE 1394 Interface

**MECHANICAL CHARACTERISTICS**

- Molded Ceramic 0201 Package
- Approximate Weight: 0.22 milligrams
- Lead-Free Plating
- Solder Reflow Temperature:
  - Lead-Free - Sn/Ag/Cu, 96/3.5/0.5: 260-270°C
- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

**PIN CONFIGURATION**

## TYPICAL DEVICE CHARACTERISTICS

### MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Operating Temperature	$T_A$	-40 to 90	°C
Storage Temperature	$T_{STG}$	-55 to 125	°C
Solder Temperature - 10s	$T_L$	260	°C


### ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified



PART NUMBER	RATED STAND-OFF VOLTAGE $V_{WM}$ VOLTS	TYPICAL TRIGGER VOLTAGE (Note 1) $V_T$ VOLTS	TYPICAL CLAMPING VOLTAGE (Note 1) $V_C$ VOLTS	MAXIMUM LEAKAGE CURRENT (Note 2) @ $V_{WM}$ $I_D$ $\mu A$	TYPICAL CAPACITANCE @ 0V, 1MHz $C_J$ pF
P0201V05	5.0	400	40.0	0.10	0.15

#### NOTES

1. Trigger and Clamping Voltage are measured per IEC 61000-4-2, 8kV contact discharge method.
2. After reliability tests such as high temperature storage, temp cycle, continuous ESD strikes, the maximum leakage current is less than 10 $\mu A$ .

**FIGURE 1**  
ESD CLAMPING TEST

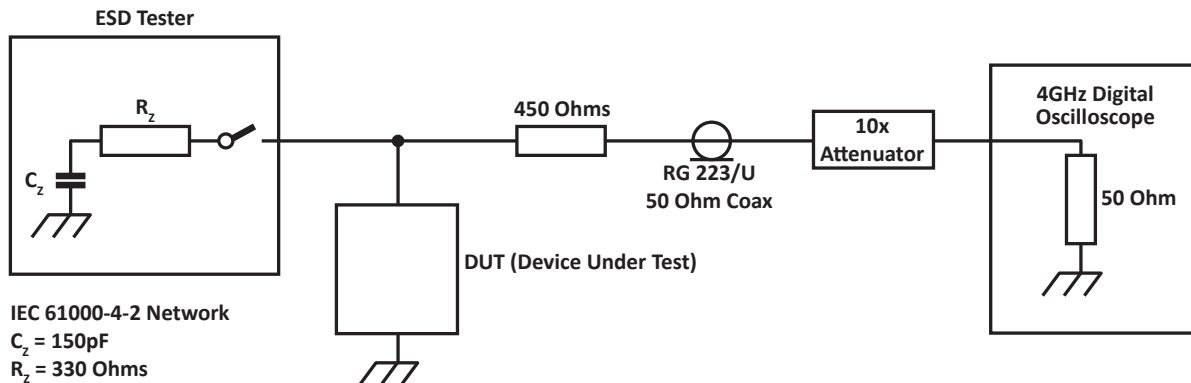

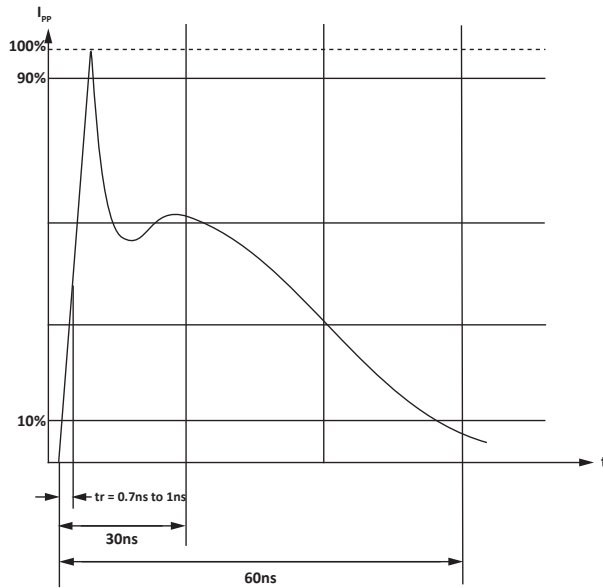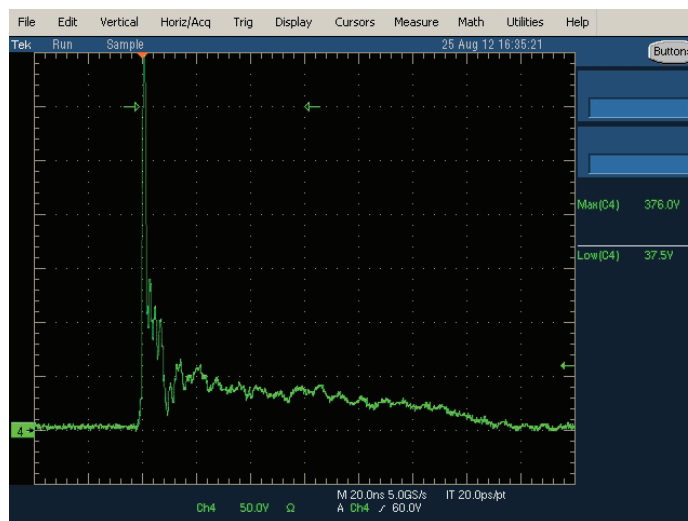**TYPICAL DEVICE CHARACTERISTICS**
**FIGURE 2**  
**TYPICAL ESD WAVEFORM**

**FIGURE 3**  
**ESD WAVE AFTER CLAMPING**


## SOLDER REFLOW INFORMATION

PRINTED CIRCUIT BOARD RECOMMENDATIONS	
PARAMETER	VALUE
Pad Size on PCB	0.275mm
Pad Shape	Round
Pad Definition	Non-Solder Mask Defined Pads
Solder Mask Opening	0.325mm Round
Solder Stencil Thickness	0.150mm
Solder Stencil Aperture Opening (Laser cut, 5% tapered walls)	0.330mm Round
Solder Paste Type	No Clean
Pad Protective Finish	OSP (Entek Cu Plus 106A)
Tolerance - Edge To Corner Ball	±50µm
Solder Ball Side Coplanarity	±20µm
Maximum Dwell Time Above Liquidous (183°C)	60 seconds
Soldering Maximum Temperature	270°C

### REQUIREMENTS



Temperature:

$T_p$  for Lead-Free (Sn/Ag/Cu): 260-270°C

$T_p$  for Tin-Lead: 240-245°C

Preheat time and temperature depends on solder paste and flux activation temperature, component size, weight, surface area and plating.

### RECOMMENDED NON-SOLDER MASK DEFINED PAD ILLUSTRATION

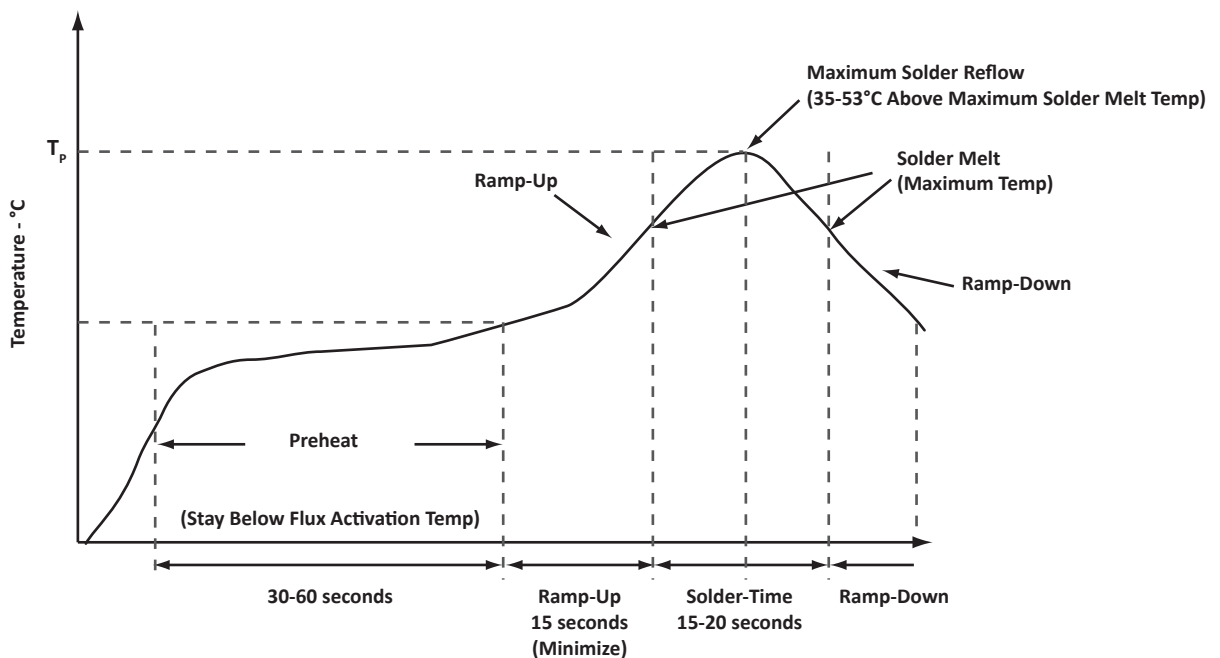
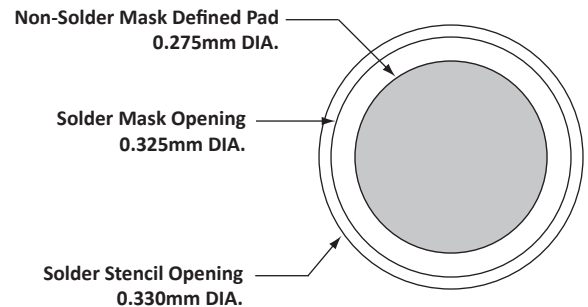


**C0201 PACKAGE INFORMATION**
**OUTLINE DIMENSIONS**

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.50	0.70	0.020	0.028
B	0.25	0.35	0.010	0.014
C	0.25	0.40	0.010	0.016
D	0.10	0.30	0.004	0.012

**NOTES**


1. Controlling dimension: millimeters.

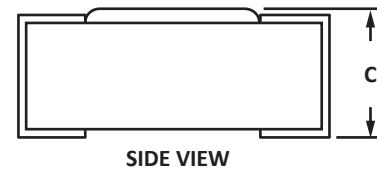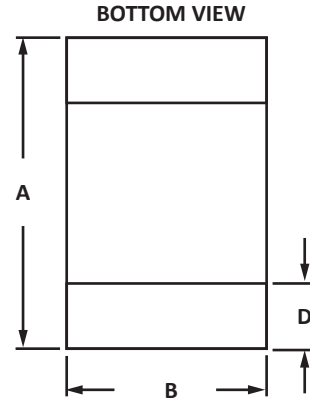
**PAD LAYOUT DIMENSIONS**


DIM	MILLIMETERS	INCHES
	NOM	NOM
A	0.30	0.012
B	0.25	0.010
C	0.60	0.024

**NOTES**

1. Controlling dimension: millimeters

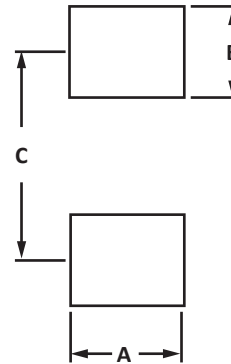

## TAPE AND REEL

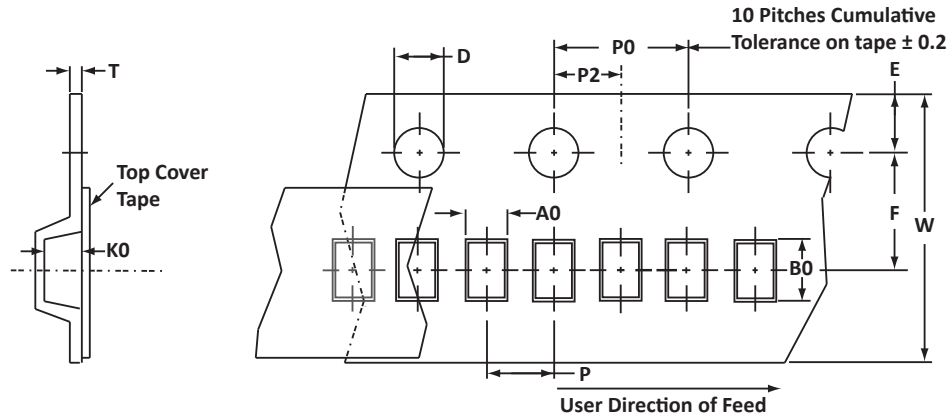

## SPECIFICATIONS

REEL DIA.	TAPE WIDTH	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")	8mm	$0.75 \pm 0.05$	$1.22 \pm 0.10$	$0.56 \pm 0.05$	$1.55 \pm 0.10$	$1.75 \pm 0.10$	$3.50 \pm 0.05$	$8.00 \pm 0.30$	$4.00 \pm 0.10$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	0.25

## NOTES

- Dimensions are in millimeters.
- Surface mount product is taped and reeled in accordance with EIA-481.
- Suffix -T715 = 7" Reel - 15,000 pieces per 8mm tape.

## ORDERING INFORMATION

BASE PART NUMBER	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
P0201V05	N/A	-T715	15,000	7"	N/A

This device is only available in a Lead-Free configuration.

## COMPANY INFORMATION

---

### COMPANY PROFILE

In business more than 20 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products.

### CONTACT US

#### Corporate Headquarters

2929 South Fair Lane  
Tempe, Arizona 85282  
USA

#### By Telephone

General: 602-431-8101  
Sales: & Marketing: 602-414-5109  
Customer Service: 602-414-5114  
Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

#### By E-mail:

Asia Sales: [asiasales@protekdevices.com](mailto:asiasales@protekdevices.com)  
Europe Sales: [europesales@protekdevices.com](mailto:europesales@protekdevices.com)  
U.S. Sales: [ussales@protekdevices.com](mailto:ussales@protekdevices.com)  
Distributor Sales: [distysales@protekdevices.com](mailto:distysales@protekdevices.com)  
Customer Service: [service@protekdevices.com](mailto:service@protekdevices.com)  
Technical Support: [support@protekdevices.com](mailto:support@protekdevices.com)

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19  
Zervex  
Singapore - 408538  
Tel: +65-67488312  
Fax: +65-67488313

#### Web

[www.protekdevices.com](http://www.protekdevices.com)

COPYRIGHT © ProTek Devices 2012 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.