

## ESD PROTECTION FOR IN-VEHICLE NETWORKS



**SOT-23 PACKAGE**

### DESCRIPTION

The PAM2IVN24 is an ESD protection device in a small SOT-23 surface mount package that is designed to protect automotive in-vehicle bus lines from the damage caused by Electrostatic Discharge (ES) and other transients.

### FEATURES

- *AEC-Q101 Qualified*
- Compatible with IEC 61000-4-2 (ESD): Air  $\pm 30\text{kV}$ , Contact  $\pm 30\text{kV}$
- Compatible with IEC 61000-4-4 (EFT)
- Compatible with IEC 61000-4-5 (Surge): 5A
- Bidirectional Configuration
- Low Clamping Voltage
- Ultra Low Leakage Current: 0.8nA @ 27°C (Typical)
- RoHS Compliant
- REACH Compliant


### APPLICATIONS

- CANBus
- LINBus
- FlexRay
- SENT

### MECHANICAL CHARACTERISTICS

- Molded JEDEC SOT-23 Package
- Approximate Weight: 8 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:  
Pure-Tin - Sn, 100: 260-270°C
- Flammability Rating UL 94V-0
- 8mm Tape and Reel per EIA Standard 481

### PIN CONFIGURATION



**TYPICAL DEVICE CHARACTERISTICS**
**MAXIMUM RATINGS @ 25°C Unless Otherwise Specified**


PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Current, $t_p = 8/20\mu s$	$I_{PPM}$	5.0	Amps
Peak Pulse Power ( $t_p = 8/20\mu s$ ) - See Figure 1	$P_{PP}$	150	Watts
Junction Temperature	$T_J$	-55 to 150	°C
Storage Temperature	$T_{STG}$	-65 to 150	°C
Ambient Temperature	$T_A$	-55 to 150	°C
ESD Voltage Rating per IEC 61000-4-2 (Air and Contact)	$V_{ESD}$	±30	kV

**ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified**

PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE  $V_{WM}$ VOLTS	BREAKDOWN VOLTAGE  @ 1mA $V_{(BR)}$ VOLTS			CLAMPING VOLTAGE (Fig. 2)  @ $I_p = 3.5A$ $V_c$ VOLTS		LEAKAGE CURRENT  @ $V_{WM}$ 27°C $I_D$ nA		MAXIMUM LEAKAGE CURRENT (See Note 1)  @ $V_{WM}$ 125°C $I_D$ nA	CAPACITANCE (See Note 1-2)  @ 5V, 250KHz/1MHz C pF	
			MIN	TYP	MAX	TYP	MAX	TYP	MAX		TYP	MAX
PAM21VN24	24V	24.0	25.5	27.0	30.3	38	42	0.8	5	10	20	25

**NOTES**

- Guaranteed by design.
- Capacitance difference between two channels is < 5%.

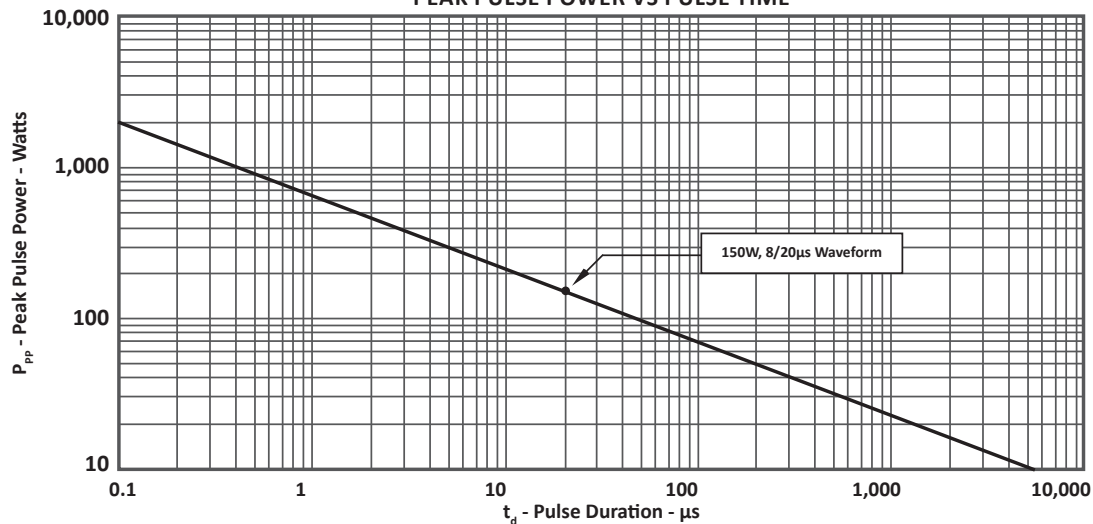**FIGURE 1  
PEAK PULSE POWER VS PULSE TIME**


## TYPICAL DEVICE CHARACTERISTICS

FIGURE 2  
PULSE WAVE FORM


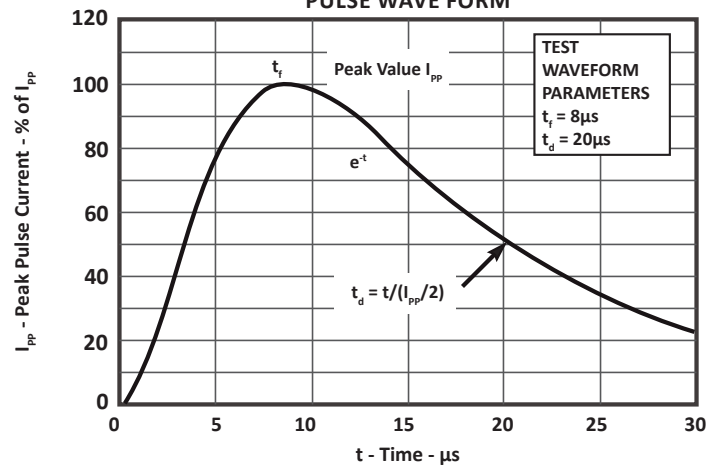


FIGURE 3  
POWER DERATING CURVE

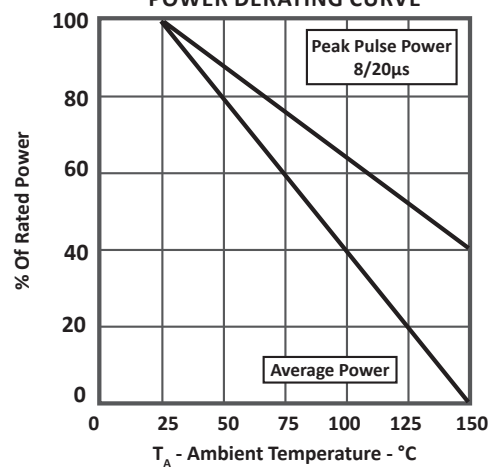

## TYPICAL DEVICE CHARACTERISTICS

FIGURE 4  
PEAK CURRENT VS CLAMPING VOLTAGE


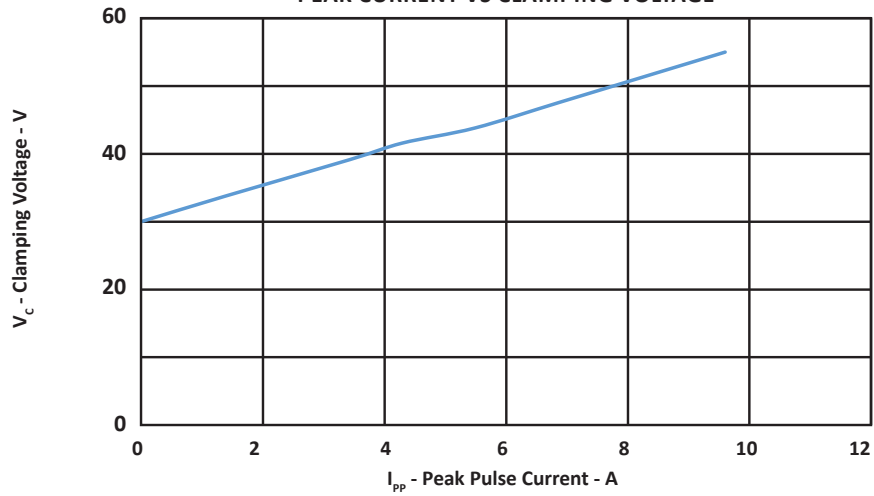


FIGURE 5  
TYPICAL REVERSE LEAKAGE VS JUNCTION TEMPERATURE

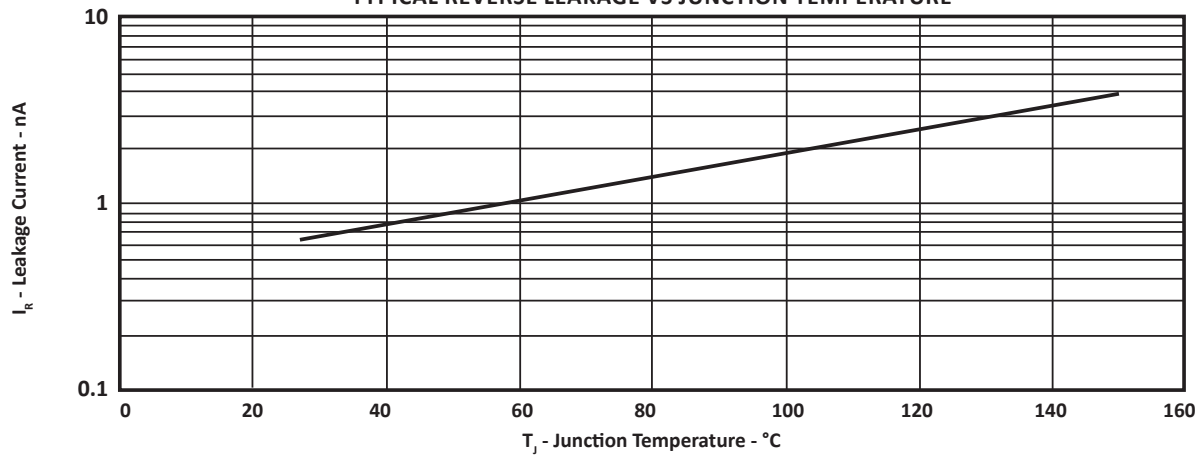


**SOD-323 PACKAGE INFORMATION**
**OUTLINE DIMENSIONS**

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.110	0.120
B	1.20	1.40	0.047	0.055
C	0.89	1.11	0.035	0.044
D	0.37	0.50	0.015	0.020
G	1.78	2.04	0.070	0.081
H	0.013	0.100	0.001	0.004
J	0.085	0.177	0.003	0.007
K	0.45	0.60	0.018	0.024
L	0.89	1.02	0.035	0.040
S	2.10	2.50	0.083	0.098
V	0.45	0.60	0.018	0.024

**NOTES**


1. Controlling dimension: inches.
2. Dimensioning and tolerances per ANSI Y14.5M, 1985.
3. Pin 3 is the cathode (Unidirectional Only)
4. Dimensions are exclusive of mold flash and metal burrs.

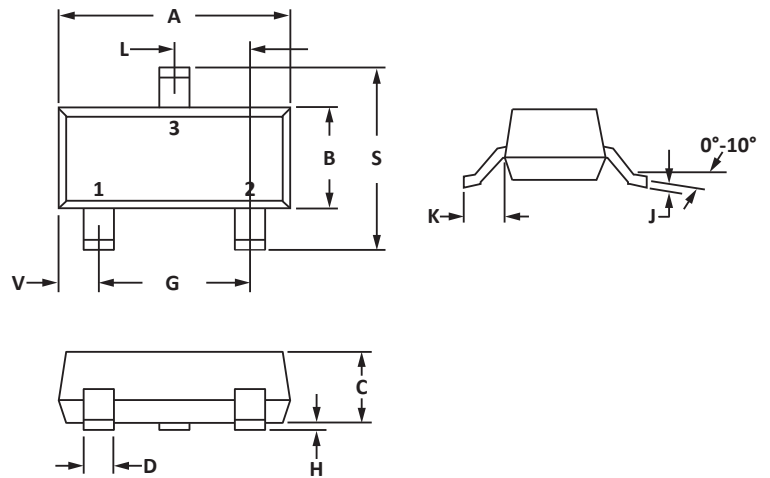
**PAD LAYOUT DIMENSIONS**


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.71	0.97	0.028	0.038
B	1.88	2.13	0.074	0.084
C	0.71	0.97	0.028	0.038
D	0.81	1.07	0.032	0.042

**NOTES**

1. Controlling dimension: inches.

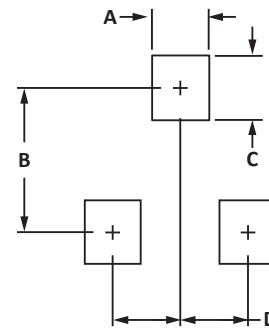

## TAPE AND REEL

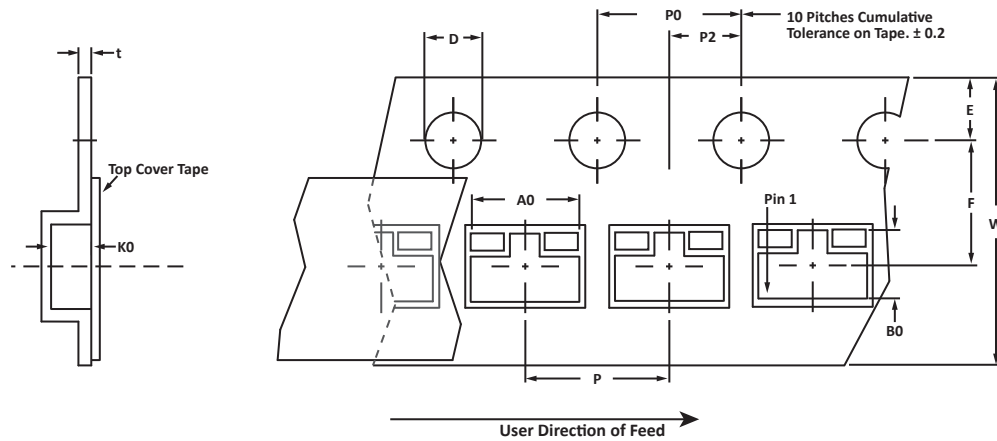

## SPECIFICATIONS

REEL DIA.	TAPE WIDTH	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")	8mm	3.15 ± 0.10	2.77 ± 0.10	1.30 ± 0.10	1.55 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.228

## NOTES

- Dimensions are in millimeters.
- Surface mount product is taped and reeled in accordance with EIA-481.
- Suffix - T73 = 7" Reel - 3,000 pieces per 8mm tape.
- Marking on Part - marking code (see page 2).

## ORDERING INFORMATION

BASE PART NUMBER	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
PAM2IVN24	N/A	-T73	3000	7"	N/A

This device is only available in a Lead-Free configuration.

## COMPANY INFORMATION

---

### COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001:2015 certified.

### CONTACT US

#### Corporate Headquarters

2929 South Fair Lane  
Tempe, Arizona 85282  
USA

#### By Telephone

General: 602-431-8101  
Sales: & Marketing: 602-414-5109  
Customer Service: 602-414-5114  
Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

#### By E-mail:

Asia Sales: [asiasales@protekdevices.com](mailto:asiasales@protekdevices.com)  
Europe Sales: [europesales@protekdevices.com](mailto:europesales@protekdevices.com)  
U.S. Sales: [ussales@protekdevices.com](mailto:ussales@protekdevices.com)  
Distributor Sales: [distysales@protekdevices.com](mailto:distysales@protekdevices.com)  
Customer Service: [service@protekdevices.com](mailto:service@protekdevices.com)  
Technical Support: [support@protekdevices.com](mailto:support@protekdevices.com)

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19  
Zervex  
Singapore - 408538  
Tel: +65-67488312  
Fax: +65-67488313

#### Web

[www.protekdevices.com](http://www.protekdevices.com)

COPYRIGHT © ProTek Devices 2018 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.