

1500 WATT TVS COMPONENT



APPLICATIONS

- Automotive


FEATURES

- **AEC-Q101 Qualified**
- UL Registered
- IEC Compatibility 61000-4-2 (ESD)
- IEC Compatibility 61000-4-4 (EFT)
- IEC Compatibility 61000-4-5 (Surge)
- 1500 Watts Peak Pulse Power per Line ($t_p = 10/1000\mu s$)
- Halogen-Free
- Low Profile Package
- Built-in Strain Relief
- Glass Passivated Junction
- Excellent Clamping Capability
- Repetition Rate (Duty Cycle): 0.05%
- Fast Response Time: Typically less than 1.0ps from 0 Volts to BV Min
- Typical IR < $1\mu A$ above 12V
- High Temperature Soldering: 260°C/40 seconds at Terminals
- Available in Multiple Voltages
- Bidirectional and Unidirectional Configurations
- RoHS Compliant
- REACH Compliant

MECHANICAL CHARACTERISTICS

- Molded JEDEC DO-214AB Package
- Approximate Weight: 0.21 grams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- 16mm Tape and Reel Per EIA Standard 481
- Terminal: Solderable per MIL-STD-750, Method 2026
- Flammability Rating UL 94V-0

PIN CONFIGURATIONS

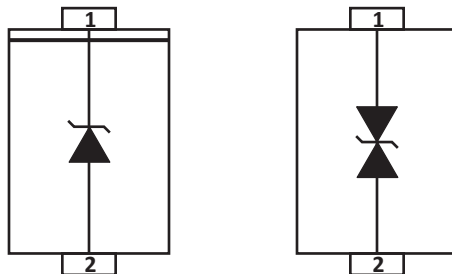

TYPICAL DEVICE CHARACTERISTICS
MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Operating Temperature	T_L	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Peak Pulse Power (tp =10/1000µs) - See Figure 1	P_{PP}	1500	Watts

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified


PART NUMBER (Notes 1 -2)	DEVICE MARKING	REVERSE STAND-OFF VOLTAGE V_{RWM} VOLTS	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ VOLTS		TEST CURRENT $@ I_T$ mA	MAXIMUM CLAMPING VOLTAGE (Fig. 2) $@ I_P$ V_C VOLTS	PEAK PULSE CURRENT $@ I_{PP}$ AMPS	REVERSE LEAKAGE CURRENT $@ V_{RWM}$ I_R µA
			MIN	MAX				
PAM35DOAB6.8A	6V8A	5.80	6.45	7.14	10	10.5	144.8	1000
PAM35DOAB15A	15A	12.80	14.30	15.80	1	21.2	71.7	1
PAM35DOAB24A	24A	20.5	22.8	25.2	1	33.2	45.2	1
PAM35DOAB27A	27A	23.10	25.70	28.40	1	37.5	40.5	1
PAM35DOAB30A	30A	25.60	28.50	31.50	1	41.4	36.7	1
PAM35DOAB36A	36A	30.8	34.2	37.8	1	49.9	30.5	1
PAM35DOAB47A	47A	40.20	44.70	49.40	1	64.8	23.5	1
PAM35DOAB62A	62A	53.00	58.90	65.10	1	85.0	17.9	1
PAM35DOAB75A	75A	64.20	71.30	78.80	1	103.0	14.8	1
PAM35DOAB300A	300A	256.00	285.00	315.00	1	414.0	3.7	1

NOTE


- Part numbers shown are unidirectional devices only. Add "C" to specify bidirectional when ordering, i.e., PAM35DOAB30CA.
- Marking code shown are for unidirectional devices only. Replace "A" with "C" for device marking, i.e., marking code for PAM35DOAB30CA is 30C.

TYPICAL DEVICE CHARACTERISTICS


**FIGURE 1
PEAK PULSE POWER VS PULSE TIME**

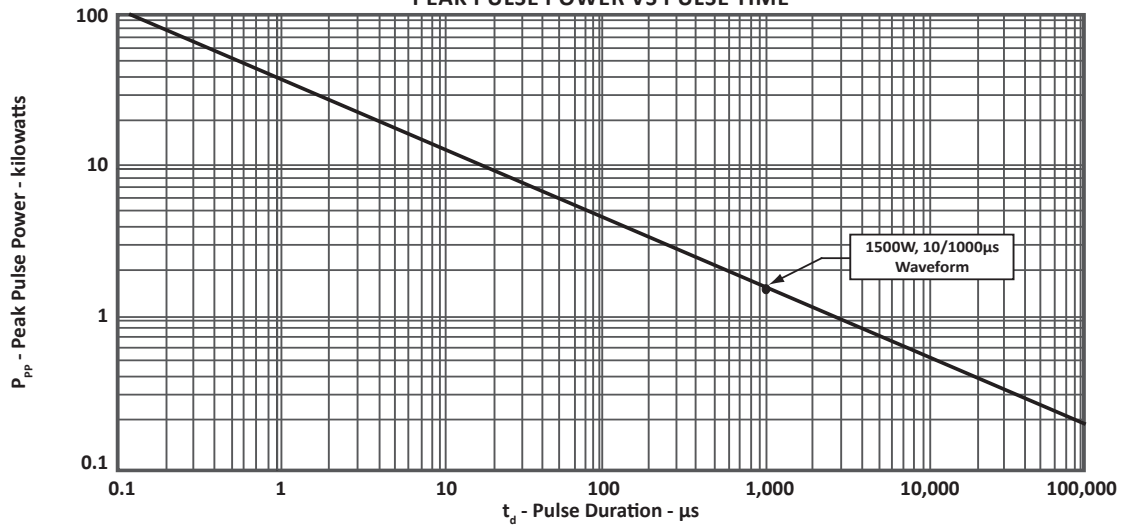

**FIGURE 2
PULSE WAVEFORM**

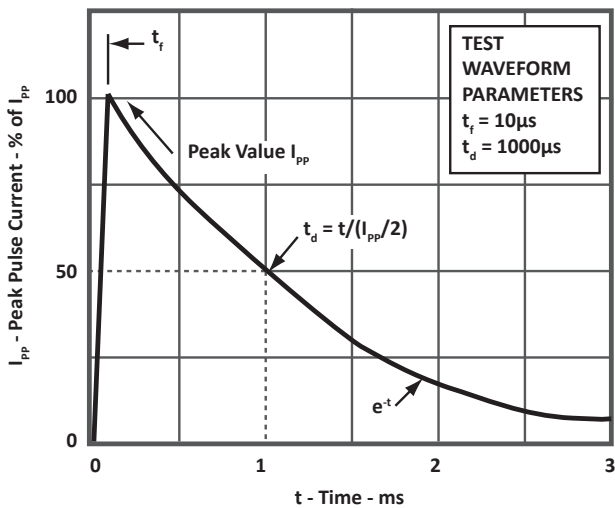


**FIGURE 3
POWER DERATING CURVE**

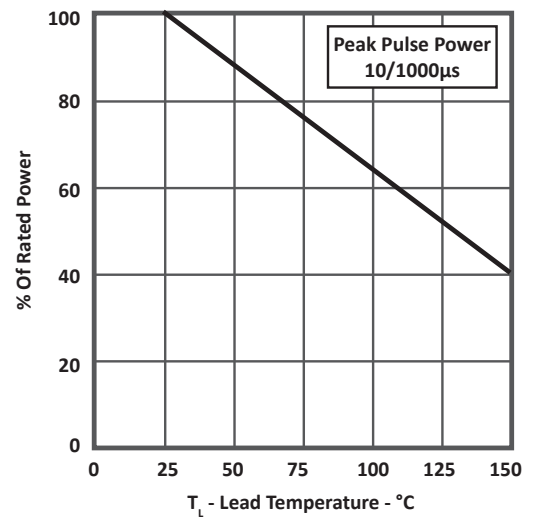


TYPICAL DEVICE CHARACTERISTICS


**FIGURE 4
TYPICAL JUNCTION CAPACITANCE**

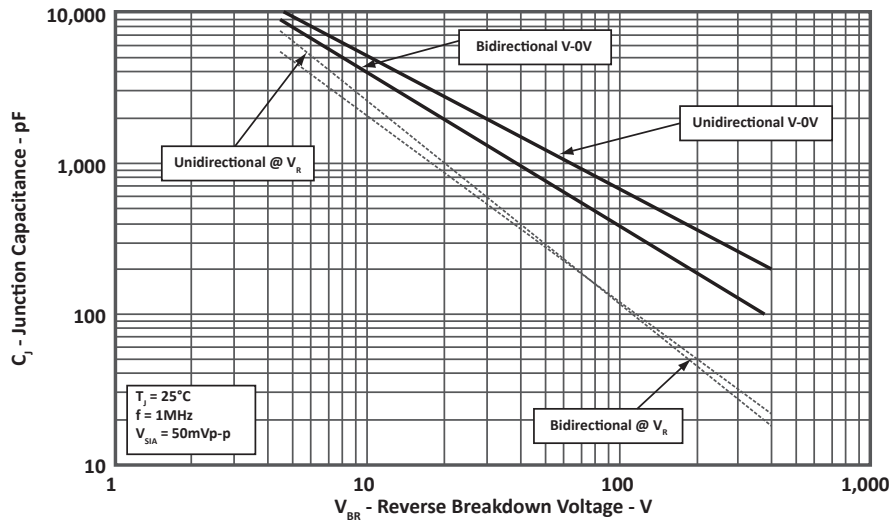

**FIGURE 5
MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT
(UNIDIRECTIONAL ONLY)**

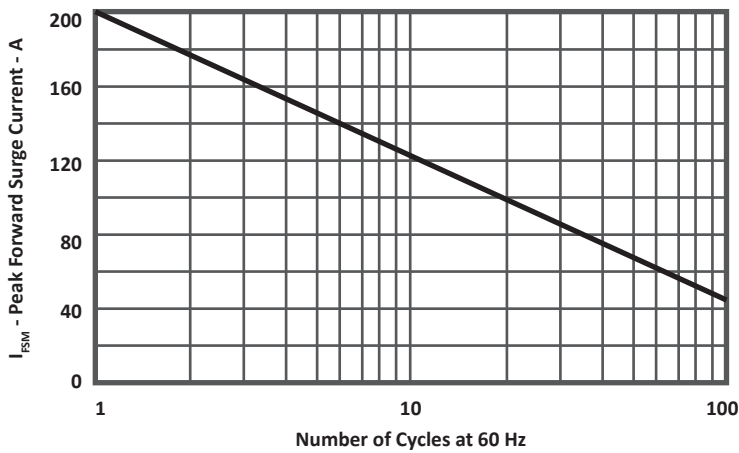

**FIGURE 6
STEADY STATE POWER DERATING CURVE**

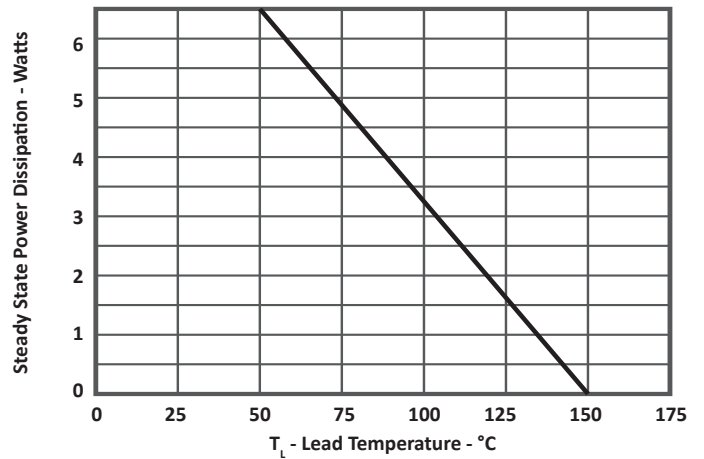


DO-214AB PACKAGE INFORMATION

OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.75	3.25	0.108	0.128
B	6.90	7.40	0.272	0.291
C	5.75	6.25	0.226	0.246
D	2.15	2.62	0.085	0.103
E	0.95	1.52	0.037	0.060
F	0.051	0.203	0.002	0.008
G	7.70	8.20	0.303	0.323
H	0.15	0.31	0.006	0.012


NOTES

1. Dimensions are exclusive of mold flash and metal burrs.

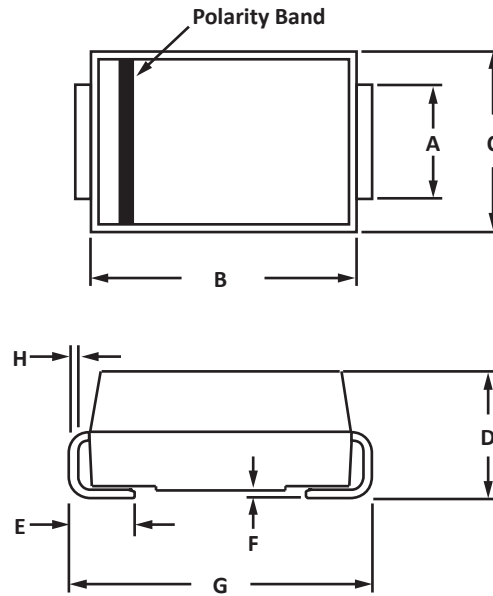


PAD LAYOUT DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	3.30	-	0.130	-
B	2.40	-	0.094	-
C	-	4.20	-	0.165
D	2.40	-	0.094	-

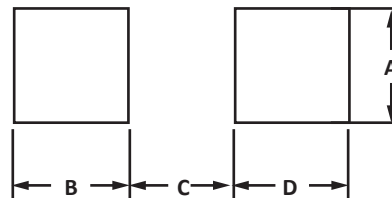

TAPE AND REEL

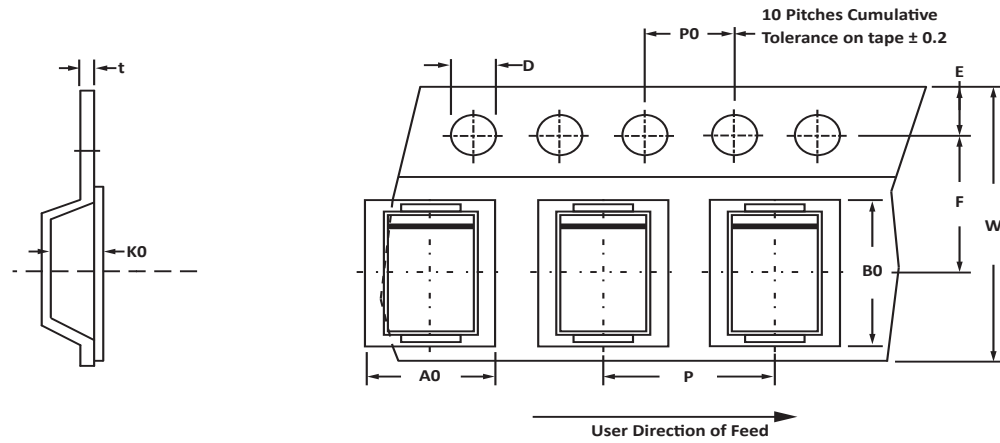

SPECIFICATIONS

REEL DIA.	TAPE WIDTH	A0	B0	K0	D	E	F	W	P0	P	tmax
330mm (13")	16mm	6.05 ± 0.30	8.31 ± 0.30	2.54 ± 0.10	1.55 ± 0.05	1.75 ± 0.10	7.5 ± 0.10	16.00 ± 0.30	4.00 ± 0.10	8.00 ± 0.10	0.4

NOTES

- Dimensions are in millimeters.
- Surface mount product is taped and reeled in accordance with EIA-481.
- Marking on Part - marking code (see page 2), date code, logo and cathode defined by polarity band.

ORDERING INFORMATION

BASE PART NUMBER (xx = Voltage)	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
PAM35DOABxxA	N/A	-T13	3,000	13"	98
PAM35DOABxxCA	N/A	-T13	3,000	13"	98

This device is only available in a Lead-Free configuration.

COMPANY INFORMATION

COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is an ISO 9001 certified company.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2018 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.