



DFN-2 PACKAGE

## DESCRIPTION

The SM15KWExxA/CA Series are high-powered surface mount transient voltage suppression components designed to protect equipment and systems from the damaging effects of high voltage spikes. The DFN-2-KW surface mount package configuration provides a lower profile at a reduce cost.

These devices provide 15 kilowatts of peak pulse power dissipation for an 10/1000 $\mu$ s waveform. Applications include relay drive protection module and secondary lightning protection.

## FEATURES

- RTCA DO-160G COMPLIANT PRODUCT
- Compatible with IEC 61000-4-2 (ESD): Air  $\pm 15$ kV, Contact  $\pm 8$ kV
- Compatible with IEC 61000-4-4 (EFT): 40A, 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 60kW, 8/20 $\mu$ s
- 15 kilowatts Peak Pulse Power per Line (tp = 10/1000 $\mu$ s)
- Unidirectional & Bidirectional Configurations
- Easy Mounting to Printed Circuit Board
- RoHS Compliant


## APPLICATIONS

- Relay Drives
- Motor (Start/Stop) Back EMF Protection
- Module Lightning Protection
- Secondary Lightning Protection


## MECHANICAL CHARACTERISTICS

- Molded Surface Mount Package
- Approximate Weight: 1.2 grams
- Lead-Free Pure-Tin Plating
- Solder Reflow Temperature:  
Pure-Tin - Sn, 100: 260-270°C
- Flammability Rating UL 94V-0

## PIN CONFIGURATIONS



UNIDIRECTIONAL



BIDIRECTIONAL

## TYPICAL DEVICE CHARACTERISTICS

## RTCA DO-160G COMPLIANT PRODUCT

## MAXIMUM RATINGS @ 25°C Unless Otherwise Specified



PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp = 10/1000μs) - See Figure 1	$P_{PP}$	15	kilowatts
Storage Temperature	$T_{STG}$	-55 to +150	°C
Operating Temperature	$T_J$	-55 to +150	°C

## ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (Note 1)	MARKING CODE		RATED STAND-OFF VOLTAGE  $V_{WM}$ VOLTS	MINIMUM BREAKDOWN VOLTAGE		MAXIMUM LEAKAGE CURRENT  @ $V_{WM}$ $I_D$ μA	MAXIMUM CLAMPING VOLTAGE (Fig. 2)  @ 10/1000μs $V_C @ I_{PP}$
	UNI	BI		MIN $V_{(BR)}$ VOLTS	@ $I_T$ mA		
SM15KWE15A	15A	15C	15.0	16.9	5	10	24.4V @ 618A
SM15KWE20A	20A	20C	20.0	22.2	5	10	34.3V @ 437A
SM15KWE24A	24A	24C	24.0	26.7	5	10	38.9V @ 384A
SM15KWE28A	28A	28C	28.0	31.1	5	10	47.5V @ 316A
SM15KWE30A	30A	30C	30.0	33.3	5	10	50.7V @ 296A
SM15KWE33A	33A	33C	33.0	38.6	5	5	54.8V @ 274A
SM15KWE36A	36A	36C	36.0	40.0	5	5	59.7V @ 251A
SM15KWE40A	40A	40C	40.0	44.3	5	5	65.2V @ 230A
SM15KWE48A	48A	48C	48.0	53.3	5	5	77.7V @ 193A
SM15KWE54A	54A	54C	54.0	60.3	5	5	87.1V @ 172A
SM15KWE58A	58A	58C	58.0	64.4	5	5	96.8V @ 155A
SM15KWE70A	70A	70C	70.0	77.8	5	5	114.0V @ 132A
SM15KWE75A	75A	75C	75.0	83.3	5	5	122.0V @ 123A
SM15KWE78A	78A	78C	78.0	87.0	5	5	126.0V @ 119A
SM15KWE85A	85A	85C	85.0	94.6	5	5	141.5V @ 106A
SM15KWE90A	90A	90C	90.0	100.0	5	5	146.0V @ 103A
SM15KWE110A	110A	110C	110.0	121.0	5	5	178.0V @ 84A
SM15KWE120A	120A	120C	120.0	132.0	5	5	193.0V @ 78A
SM15KWE150A	150A	150C	150.0	166.0	5	5	250.0V @ 60A


## NOTES

1. Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as SM15KWE30CA.

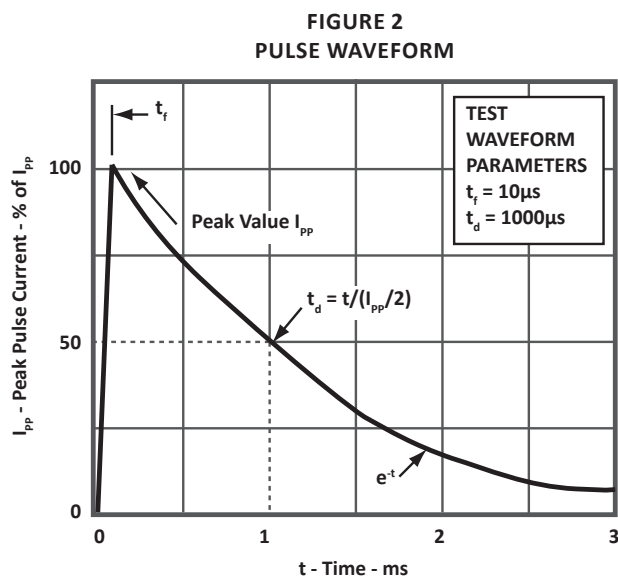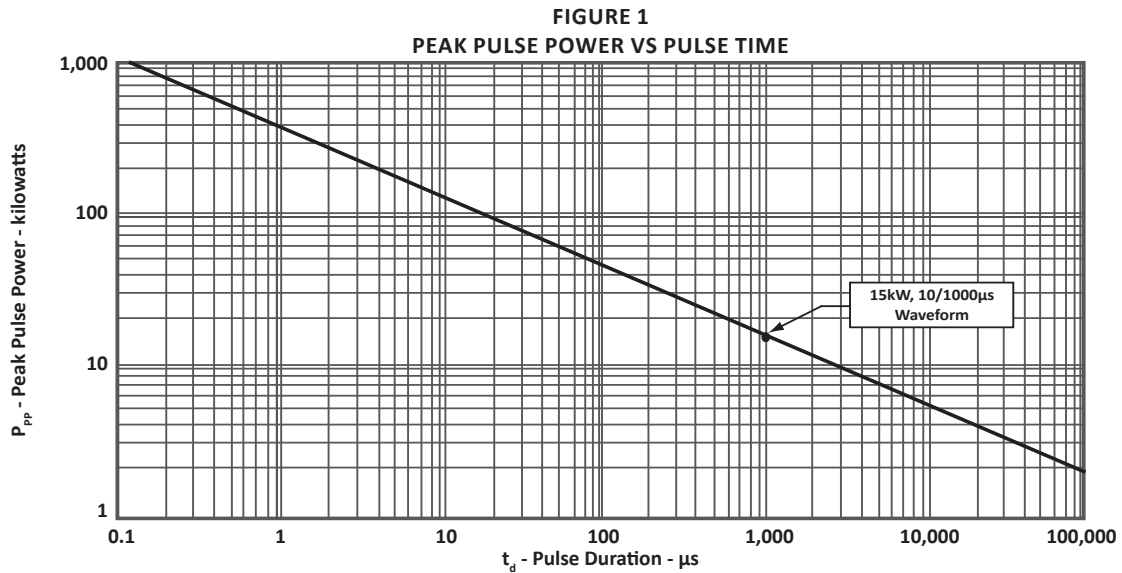

**TYPICAL DEVICE CHARACTERISTICS**

**FIGURE 3  
POWER DERATING CURVE**

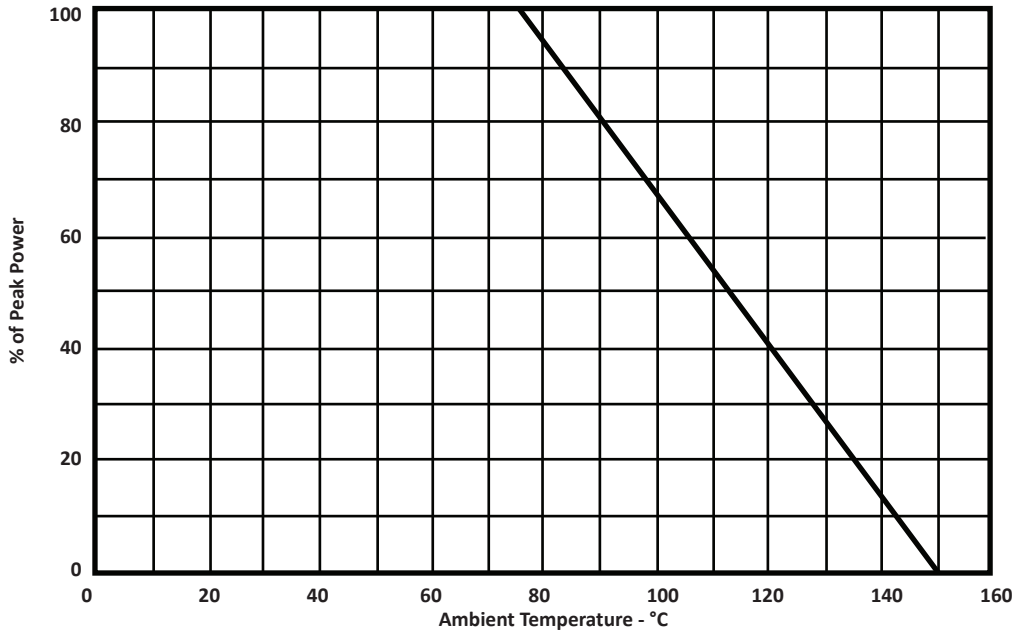

## PACKAGE INFORMATION

## RTCA DO-160G COMPLIANT PRODUCT

## OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.95	11.15	0.431	0.439
B	9.04	9.24	0.356	0.364
C	2.95	3.15	0.116	0.124
D	7.06	7.16	0.278	0.282
E	0.97	1.07	0.038	0.042
F	3.61	3.81	0.142	0.150
G	4.62	4.72	0.185	0.189
H	0.83	1.03	0.033	0.041
J	8.03	8.23	0.316	0.324
K	0.46	0.56	0.018	0.022
L	4.46	4.66	0.174	0.184
M	4.01	4.21	0.158	0.166
N	0.60	0.70	0.024	0.028
P	0.20	0.30	0.008	0.012

## NOTES


1. Dimensions are exclusive of mold flash and metal burrs.
2. Polarity band for unidirectional parts only.

## PCB PAD LAYOUT DIMENSIONS


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	0.95	0.032	0.038
B	1.07	1.22	0.042	0.048
C	4.54		0.179	
D	4.11		0.162	
E	9.04		0.356	
F	7.26	7.36	0.286	0.290
G	1.17	1.32	0.046	0.052
H	3.46	3.61	0.136	0.143
J	4.91	5.06	0.195	0.199

## NOTES

1. Suggested solder print uses some dimensions as PCB pad layout.

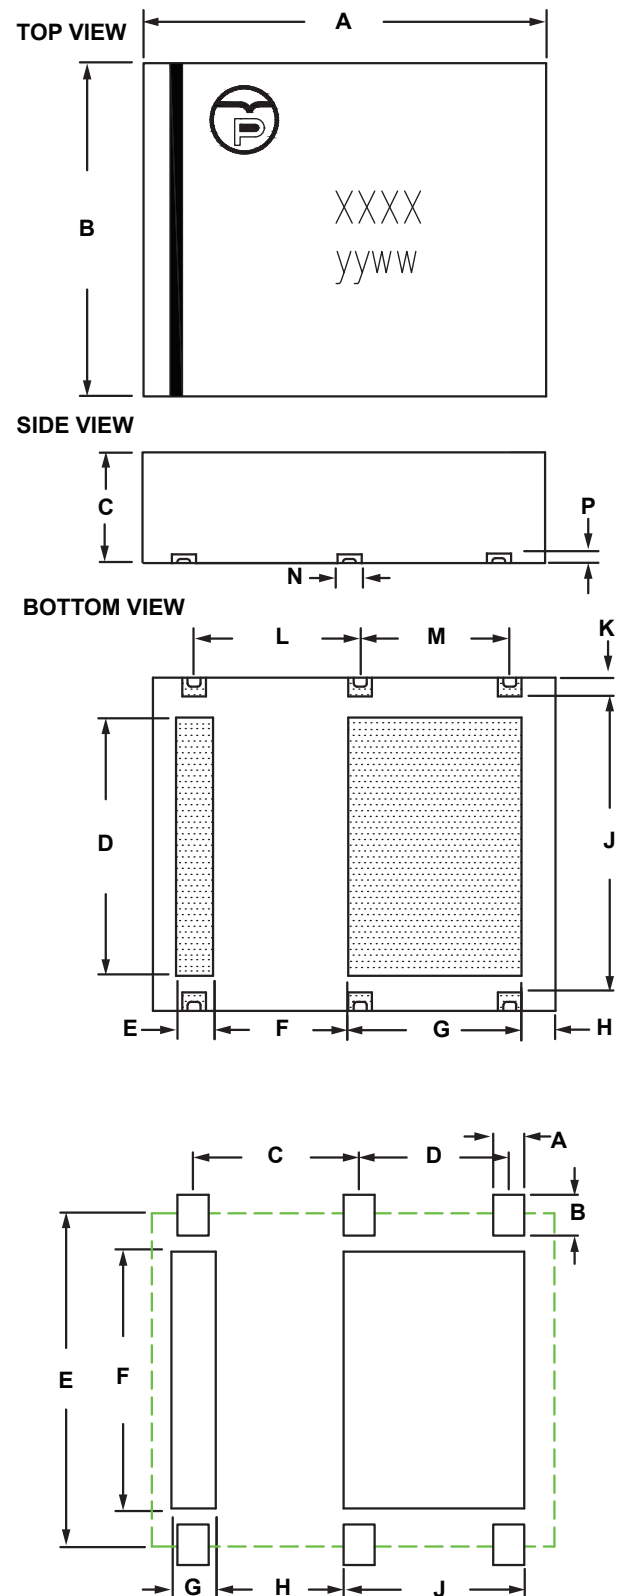

## TAPE AND REEL

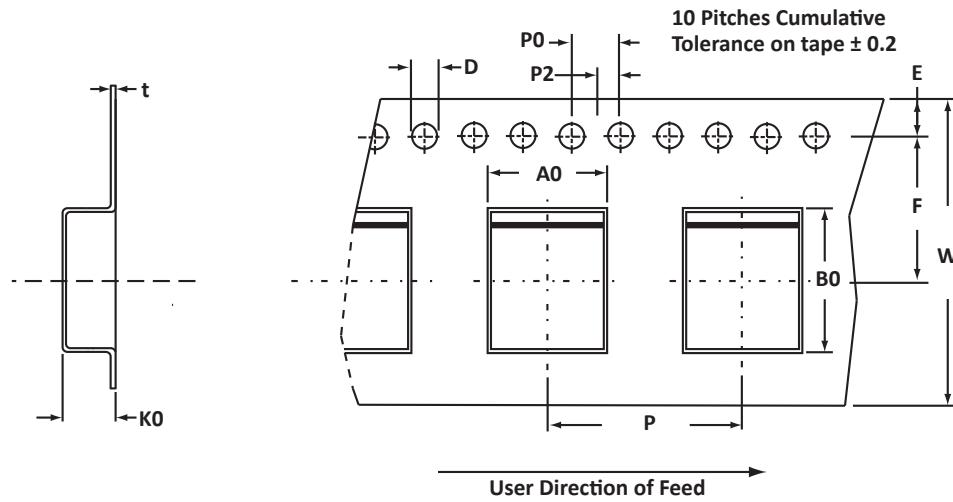

## SPECIFICATIONS

REEL DIA.	TAPE WIDTH	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
330mm (13")	24mm	9.40 ± 0.10	11.60 ± 0.10	3.175 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	11.5 ± 0.10	24.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.10	16.00 ± 0.10	0.30

## NOTES

1. Dimensions are in millimeters.
2. Surface mount product is taped and reeled in accordance with EIA-481.
3. Marking on Part - marking code (see page 2), date code, logo and polarity band (Unidirectional only).

## ORDERING INFORMATION

BASE PART NUMBER (xx = Voltage)	LEADFREE SUFFIX	TAPE SUFFIX	QTY/REEL	REEL SIZE	TUBE QTY
SM15KWExxA/CA	n/a	-T13	1000	13"	n/a
SM15KWExxA/CA	n/a	-T71	100	7"	n/a

This device is only available in a Lead-Free configuration.

**COMPANY INFORMATION****RTCA DO-160G COMPLIANT PRODUCT****COMPANY PROFILE**

In business more than 30 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection that include Transient Voltage Suppressor (TVS) Arrays, Steering Diode Array Hybrids, High-power Components and Modules, as well as Steering Diodes, EMI Filter/TVS Arrays and Thyristor Surge Suppressors. These components deliver circuit protection in electronic systems from numerous overvoltage events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices is an ISO 9001 certified company.

**CONTACT US****Corporate Headquarters**

2929 South Fair Lane  
Tempe, Arizona 85282  
USA

**By Telephone**

General: 602-431-8101  
Sales: & Marketing: 602-414-5109  
Customer Service: 602-414-5114  
Product Technical Support: 602-414-5107

**By Fax**

General: 602-431-2288

**By E-mail:**

Asia Sales: [asiasales@protekdevices.com](mailto:asiasales@protekdevices.com)  
Europe Sales: [europesales@protekdevices.com](mailto:europesales@protekdevices.com)  
U.S. Sales: [ussales@protekdevices.com](mailto:ussales@protekdevices.com)  
Distributor Sales: [distysales@protekdevices.com](mailto:distysales@protekdevices.com)  
Customer Service: [service@protekdevices.com](mailto:service@protekdevices.com)  
Technical Support: [support@protekdevices.com](mailto:support@protekdevices.com)

**Web**

[www.protekdevices.com](http://www.protekdevices.com)

COPYRIGHT © ProTek Devices 2017 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.